SPILL PREVENTION CONTROL & COUNTERMEASURE PLAN

PART I GENERAL INFORMATION



1.	Name of facility	Pennzoil Company (Etowah Terminal)
2.	Type of facility	Onshore Storage and Transfer Facility
3.	Location of facility	1015 Barlow Drive
		Charleston, WV 25333
	•	
4.	Name and address of o	wner or operator:
	Name Per	nnzoil Company
	AddressP.	O. Box 2967
		uston, TX 77292-2967 •
5	Designated person according	ountable for oil spill prevention at facility:
J.		William Haynes, Tankerman
6.		reportable oil spill event during the twelve months prior to Jan. 10, 1974 CFR, Part 112). (If YES, complete Attachment #1.) No
		MANAGEMENT APPROVAL
	This!	SPCC Plan will be implemented as herein described.
	Signature//	f Slmto
	Name Rona	ald J. Similo
	Title Divi	ision Manager
		CERTIFICATION
CF		re examined the facility, and being familiar with the provisions of 40 this SPCC Plan has been prepared in accordance with good engineering
		BRLAWRENCE
		Printed Name of Registered Professional Engineer
(Se	eal)	Mawell
_		Signature of Registered Professional Engineer
Dat	le	6/30/83 Registration No. 16399 State 69

PART 1 GENERAL INFORMATION

7. Potential Spills - Prediction & Control:

					Mar.	
	Source	Major Type of Failure	Total Quantity (bbls)	Rate (bbis/hr)	Direction of Flow	Secondar Containme
1.	Storage tanks	Corresion, Overfilling, Rupture	415,800 gal.	Varies	Varies	Dikeage
2.	In-Plant piping	Corrosion, Rupture	Varies	Varies	Varies	See belaw
3.	Truck Load/ Unload	Rupture, Overfill	4,000 gal.	Varies	Varies	See below
4.	Barge Handling	Hose, Rupture, Overfill	2,000 gal.	Varies	Varies	See below

~	•						٠				
D	1	C	^-1		•	~		\sim		•	
~		-	•	١.	-	2	ı	v	ı	•	

2. Mostabove ground piping is within the diked area. Other piping with exception to the barg supply line is located on the east side of the dikes away from the river. A spill on the

3. Spills at loading racks will be contained in the immediate area.

barge supply line would be containe spill boom.

1. All barge activity will require a tankerman to be on site with a boat and sufficient length of spill boom to contain a release. Also, drip pans are present to contain hose residual.

"Attach map if appropriate.

Same of Sacility	

PART I GENERAL INFORMATION

[Response to statements should be: YES, NO, or NA (Not Applicable).]

_		200
8.	Containment or diversionary structures or equipment to prevent oil from reaching	
	navigable waters are practicable. (If NO, complete Attachment #2.)	МО
9.	Inspections and Records	
	A. The required inspections follow written procedures.	МО
	B. The written procedures and a record of inspections, signed by the appropriate	2
	supervisor or inspector, are attached.	NO
	Discussion All areas of the facility are walked at least once daily	
•	by Pennzoil personnel and all tanks, valves and above ground pipel	ines
	are visually inspected at this time. Any leaks discovered are rep	orted
	and repaired immediately. Records are kept of the maintenance per	formed.
	All barge hose is hydrostatically tested annually with records ker	t of this
	All barde hose is hodroscationity tested annually with records	
	:	
10.	Personnel, Training, and Spill Prevention Procedures	
	A. Personnel are properly instructed in the following:	
	(1) operation and maintenance of equipment to prevent oil discharges, and	YES
-	(2) applicable pollution control laws rules and regulations	VES
•	Describe procedures employed for instruction: At least annually, supervise	ors
	will conduct a meeting on site with all personnel to review this ;	olan and
	its objectives.	
		
	n managana a arang managana arang managana arang managana arang managana arang managana arang managana arang m	
	B. Scheduled prevention briefings for the operating personnel are conducted fre	
	quently enough to assure adequate understanding of the SPCC Plan.	YES
	Describe briefing program: Briefings are held annually and highlight	any
	spill events that might have occurred, potential spill exposures,	
	malfunctioning components and any new precautionary measures that	can be
	taken to prevent a spill.	
	•	
		
	. —————————————————————————————————————	
٠.		
.\	me of facility	
O,	erator	

PART II. ALTERNATE A DESIGN AND OPERATING INFORMATION ONSHORE FACILITY (EXCLUDING PRODUCTION) Office



	ility Drainag	
All dike areas have valves that permit release of accumulated rainfa These valves are kept closed at all times. Drainage from undiked areas is controlled as follows (include description of pondor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release accumulation is inspected before release assure into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) in pollutants, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given as inspection. If any oil or residue is present in the dike, this mate either jumped away to storage or is cleaned up with absorbat pads, source of the oil is then investigated and the leak stoped. If the on contamination in the dike area, the dike drain is manually contend the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
Drainage from undiked areas is controlled as follows (include description of ponor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release accumulation is inspected before release assure into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary contains assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary contains assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary contains assure no oil gets into the river. Prior to draining and diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the occupant in the dike area, the dike drain is manually coned the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.	of valves, p	umps, ejectors, etc. (Note: Flapper-type valves should not be used):_
Drainage from undiked areas is controlled as follows (include description of ponor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release accumulation is inspected before release assure into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary contains assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary contains assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary contains assure no oil gets into the river. Prior to draining and diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the occupant in the dike area, the dike drain is manually coned the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.	All dika si	7000 }
Drainage from undiked areas is controlled as follows (include description of power catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release accumulation is inspected before release assure into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspellutants, and (b) method of valving security). (A record of inspection and draits to be maintained on a form similar to Attachment =3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually ocened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.	These value	seas have valves that permit release of accumulated rainfal
Drainage from undiked areas is controlled as follows (include description of pomor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pades. Source of the oil is then investigated and the leak stooped. If the no contamination in the dike area, the dike drain is manually osened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		is are kept crosed at all times.
Drainage from undiked areas is controlled as follows (include description of pomor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pades. Source of the oil is then investigated and the leak stooped. If the no contamination in the dike area, the dike drain is manually osened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
Drainage from undiked areas is controlled as follows (include description of pomor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pades. Source of the oil is then investigated and the leak stooped. If the no contamination in the dike area, the dike drain is manually osened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		**************************************
Drainage from undiked areas is controlled as follows (include description of pomor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pades. Source of the oil is then investigated and the leak stooped. If the no contamination in the dike area, the dike drain is manually osened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
Drainage from undiked areas is controlled as follows (include description of pomor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspellutants, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually ocened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		*
Drainage from undiked areas is controlled as follows (include description of pomor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspellutants, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually ocened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
Drainage from undiked areas is controlled as follows (include description of pomor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspellutants, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually ocened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
Drainage from undiked areas is controlled as follows (include description of pomor catchment basins and methods of retaining and returning oil to facility): The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspellutants, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually ocened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspected be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspected be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		-
The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspected be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.	rainage fro	im undiked areas is controlled as follows findlyde description of ponds
The truck unloading area is designed such that a ditch parallel to roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) impollutants, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
roadway collects surface runoff. A valve is present to release acc water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) in pollutants, and (b) method of valving security). (A record of inspection and draits to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.	The truck	k unloading area is designed such that a ditch parallel to t
water into the river. This accumulation is inspected before release assure no oil gets into the river. The procedure for supervising the drainage of rain water from secondary contains a storm drain or an open watercourse is as follows (include description of (a) inspection and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment =3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually ocened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually obened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspellutants, and (b) method of valving security). (A record of inspection and drai is to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.	assure no	o oil gets into the river.
The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspellutants, and (b) method of valving security). (A record of inspection and drai is to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspellutants, and (b) method of valving security). (A record of inspection and drai is to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspection and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspection and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspection and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
The procedure for supervising the drainage of rain water from secondary conta a storm drain or an open watercourse is as follows (include description of (a) inspection and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
a storm drain or an open watercourse is as follows (include description of (a) inspectionand, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
a storm drain or an open watercourse is as follows (include description of (a) inspectionand, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
a storm drain or an open watercourse is as follows (include description of (a) inspectionand, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.		
pollutants, and (b) method of valving security). (A record of inspection and drains to be maintained on a form similar to Attachment #3): Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.	he procedui	re for supervising the drainage of rain water from secondary contain
Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draic complete, the valve is manually close.	storm drain	n or an open watercourse is as follows (include description of (a) insp
Prior to draining any diked areas, the inside of the dike is given a inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the drait complete, the valve is manually close.	ollutants, ar	nd (b) method of valving security). (A record of inspection and drains
inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the drait complete, the valve is manually close.	to be main	tained on a form similar to Attachment #3):
inspection. If any oil or residue is present in the dike, this mate either pumped away to storage or is cleaned up with absorbant pads, source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the drait complete, the valve is manually close.		
either pumped away to storage or is cleaned up with absorbant pads. source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the drai complete, the valve is manually close.		
source of the oil is then investigated and the leak stopped. If the no contamination in the dike area, the dike drain is manually opened the employee remains in close proximity to the valve. When the draicomplete, the valve is manually close.		
no contamination in the dike area, the dike drain is manually obened the employee remains in close proximity to the valve. When the draicomplete, the valve is manually close.		
the employee remains in close proximity to the valve. When the draicomplete, the valve is manually close.		
complete, the valve is manually close.	n contamin	
	he employe	he valve is manually close.
	he employe	TO THE LU MANUALLY GARDE.
	he employe	
	he employe	The valve is manually close.
	he employe	

Operator___

PART H. ALTERNATE A DESIGN AND OPERATING INFORMATION ONSHORE FACILITY (EXCLUDING PRODUCTION)

[Response to statements should be: YES, NO, or NA (Not Applicable).]

D.

∴.



1.	
	Describe tank design, materials of construction. fail-safe engineering features, and if needed, corrosion protection:
• •	All tanks are materially and structurally compatible with their contents .
	All are of either riveted or welded mild steel plate construction, and of
	sufficient strength to safely withstand such pressures and temperatures as
	can be reasonably expected during their use. All meet applicable API speci-
_	fications.
2.	Describe secondary containment design, construction materials, and volume:
	Dikes are of masonry construction and of a capacity adequate to contain
	the contents of the largest tank and still have sufficient freeboard for
7	rainwater accumulation. The volume of the largest tank here is 415,800 gal.
3.	Describe tank inspection methods, procedures, and record keeping:
	All tanks are visually inspected daily curing gauging. Due to corrosion
	possibilities, all are periodically inspected for thickness as access
	affords, or as prudent safeguarding dictates. Those tanks, if found faulty
•	as a result of the inspection, are repaired or replaced before returning to
	service. Records are kept of such repairs.
:	
	Describe monitoring procedure:
	(b) Passing the steam return or exhaust lines through a settling tank skimmer
	(b) Passing the steam return or exhaust lines through a settling tank, skimmer,
	or other separation system. N/A
•	
5.	or other separation system. (c) Installing external heating systems. N/A N/A
	or other separation system. (c) Installing external heating systems. N/A N/A Disposal facilities for plant effluents discharged into navigable waters are
-:	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill
·:	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill
•	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill event.
•	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill event. Describe method and frequency of observations:
•	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill event. Describe method and frequency of observations:
•	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill event. Describe method and frequency of observations:
	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill event. Describe method and frequency of observations:
: .•	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill event. Describe method and frequency of observations: N/A N/A
.*	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill event. Describe method and frequency of observations:
Nam	or other separation system. (c) Installing external heating systems. Disposal facilities for plant effluents discharged into navigable waters are observed frequently for indication of possible upsets which may cause an oil spill event. Describe method and frequency of observations:

PART II, ALTERNATE A DESIGN AND OPERATING INFORMATION ONSHORE FACILITY (EXCLUDING PRODUCTION)

[Response to statements should be: YES, NO, or NA (Not Applicable).] C. Facility Transfer Operations, Pumping, and In-plant Process 1. Corrosion protection for buried pipelines: No (a) Pipelines are wrapped and coated to reduce corrosion. (b) Cathodic protection is provided for pipelines if determined necessary by elec-No trolytic testing. (c) When a pipeline section is exposed, it is examined and corrective action taken Yes as necessary. 2. Pipeline terminal connections are capped or blank-flanged and marked if the pipe-Yes line is not in service or on standby service for extended periods. Describe criteria for determining when to cap or blank-flange: Any line which is out of service for maintenance or temporarily shut down is isolated by capping or blank blank-flanging. 3. Pipe supports are designed to minimize abrasion and corrosion and allow for expansion and contraction. Describe pipe support design: Pipe supports are constructed of either concrete or steel and designed to minimize abrasion and corrosion. 4. Describe procedures for regularly examining all above-ground valves and pipelines (including flange joints, valve glands and bodies, catch pans, pipeline supports, locking of valves, and metal surfaces): All pumps, valves, pipes and fittings are routinely inspected by the operators as a part of their operating duty. Leaks or failures are immediately reported to the supervisor and promptly repaired. 5. Describe procedures for warning vehicles entering the facility to avoid damaging aboveground piping: All in-plant readways used by vehicles are well defined and clear of above ground transfer systems.

Name of facility_____

Operator_____

DESIGN AND OPERATING INFORMATION ONSHORE FACILITY (EXCLUDING PRODUCTION)

[Response to statements should be: YES. NO, or NA (Not Applicable).] @ Page

			_
D.		cility Tank Car & Tank Truck Loading/Unloading Rack	g
		ink car and tank truck loading/unloading occurs at the facility. (If YES, complete through 5 below.)	Yes
	1.	Loading/unloading procedures meet the minimum requirements and regulations of the Department of Transportation.	Yes
	2.	The unloading area has a quick drainage system.	Yes
	3.	The containment system will hold the maximum capacity of any single compartment of a tank truck loaded/unloaded in the plant. Describe containment system design, construction materials, and volume:	Yes
		Any spill in this area is directed to a ditch on the east side the loading rack which will contain the product for clean up.	of
	4.	An interlocked warning light, a physical barrier system, or warning signs are provided in loading/unloading areas to prevent vehicular departure before disconnect of transfer lines. Describe methods, procedures, and/or equipment used to prevent premature departure: Warning signs are located at all loading/unloading areas	Yes vehicular
		addition, regular operating procedure requires that prior to depar an inspection be made to ensure that all lines are disconnected, v	ture
		tightly shut, and that there are no leaks.	
		Drains and outlets on tank trucks and tank cars are checked for leakage before loading/unloading or departure.	Yes
1	Van	ne of facility	
C	Oper	rator	

PART II. ALTERNATE A DESIGN AND OPERATING INFORMATION ONSHORE FACILITY (EXCLUDING PRODUCTION)

[Response to statements should be: YES, NO, or NA (Not Applicable).]



:. Se	ecurity	
1.	Plants handling, processing, or storing oil are fenced.	Yes
2.	Entrance gates are locked and/or guarded when the plant is unattended or not in production.	Yes
3.	Any valves which permit direct outward flow of a tank's contents are locked closed when in non-operating or standby status.	Yes
4.	Starter controls on all oil pumps in non-operating or standby status are: (a) locked in the off position; (b) located at site accessible only to authorized personnel.	No Yes
. 5.	Discussion of items 1 through 4 as appropriate: The facility is fully surby a cyclone fence, locked when unattended.	rounded
	All tank water draw-off valves remain locked at all times when not operation.	in
	Switches to pumps are not locked. However, main electrical disconswitches are shut off to de-energize all pumps not in use. These disconnect switches are located within the locked confines of the ings.	
6.	Discussion of the lighting around the facility: The plant is equipped with to dawn lighting located so that any spill, vandalism, or mischied conduct would be readily detected.	dust rous
Nr	me of facility	
	erator	

SPICE PLAN. ATTACHMENT =1 SPILL HISTORY

<u></u>	·		navigable water.)	ONGINAL Pregi
Da	ate	Volume	Cause:	
-11	See Attac	hed Report"		
C _o		tion taken:		
·				
Pla	ans for prev	enting recurrence:		· · · · · · · · · · · · · · · · · · ·
_				
Da —	te	Volume	Cause:	
	·			
C ₀ :	rrective act	ion taken:		
				
Pia	ins for prev			
Da	te	Volume	Cause:	
C01	rective act	ion taken:		
 Pl::	as for arev			
-				

SPCC PLAN, ATTACHMENT ±2 OIL SPILL CONTINGENCY PLANS AND WRITTEN COMMITMENT OF MANPOWER

Secondary containment or diversionary structures are impracticable for this facility for the following reasons (attach additional pages if necessary):

Barge activity affords no positive means of secondary containment due to the physical layout of the dock. Therefore, to contain a spill, our contingency plan calls for a boat to be available with sufficient spill boom and sorbent material to collect any release of cil at this site due to hose rupture or overfill. Manpower to be utilized will come from our employees assisted by the barge crew.

	İ		Yes
strong oil spill contingency plan is attached.	•		Yes
written commitment of manpower is attached.	•		Yes
Name of facility			
Operator.		,	

(Attachment #2 SPCC !lan)

SPCC PLAN, ATTACHMENT ±3 ONSHORE FACILITY BULK STORAGE TANKS DRAINAGE SYSTEM

Inspection Procedure:




Prior to draining any diked areas, the inside of the dike is given a visual inspection. If any oil or residue is present in the dike, this material is either pumped away to storage or is cleaned up with absorbant pads. The source of the oil is then investigated and the leak stopped. If there is no contamination in the dike area, the dike drain is manually opened and the employee remains in close proximity to the valve. When the draining is complete, the valve is manually closed.

Record of drainage, bypassing, inspection, and oil removal from secondary containment:

Date of Drainage	<u>Dypa</u> Open	essing Closed	Date of Inspection	Oil Removal	Supervisor's or Inspector's Signature
	01.61	Closell	1113://	On Removal	The hector 2 cisiminic

Name of facility	
Operator	

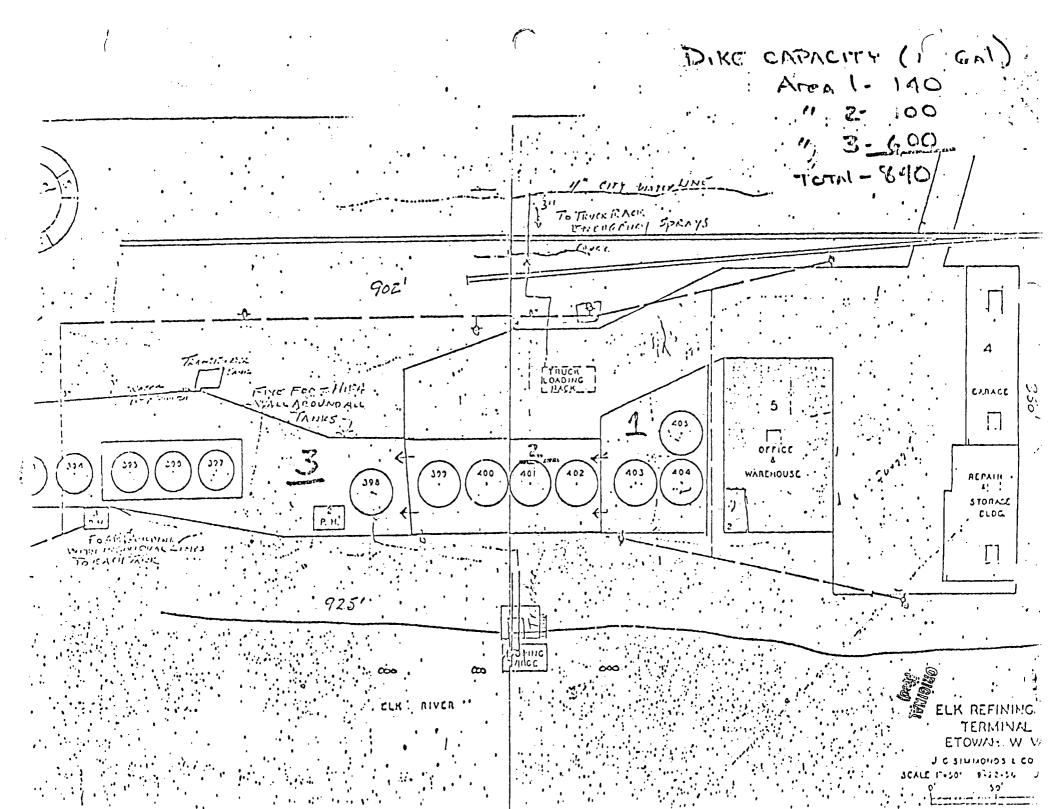

ر کی ا

MAR 21 REC'D



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY REGION III

841 Chestnut Building Philadelphia, Pennsylvania 19107



IN REPLY REFER TO: 3HW22

PENNZOIL 1015 BARLOW DRIVE CHARLESTON, WV. 25333

MAR 1 8 1986

RE: WV88131 2-3-88 CHARLESTON, WV.

Gentlemen:

This office has received notification that your facility discharged oil or hazardous materials in quantities that may be harmful, in violation of Section 311(b)(3) of the Federal Water Pollution Control Act Amendments of 1972, 33 U.S.C. § 1321(b)(3). Pursuant to Section 308(a), 33 U.S.C. § 1318(a), you are hereby required to submit to EPA the following information. Any person who violates Section 308 is subject to a civil penalty of up to \$10,000 per day of violation. 33 U.S.C. § 1319(d). Further, any person who willfully or negligently violates Section 308 may be punished by a fine of not less than \$2,500, nor more than \$25,000 per day of violation, or by imprisonment for not more than one year or both. 33 U.S.C. § 1319(c)(1).

1.	Does the facility have a National Pollutant Discharge Elimination
	System (NPDES) Permit? YES or NO Yes If YES, state the Permit number: WV0045225
	If YES, state the Permit number: WV0045225
2.	Does the facility currently have a Resource Conservation and Recovery
	Act (RCRA) Permit or is the facility under Interim Status?
	No -
3.	Does the facility have a Spill Prevention Control and Countermeasure (SPCC) Plan certified and implemented in accordance with 40 CFR 112?
	YES or NO: Yes
4.	Time and date of discharge.
	Discharge began sometime after 4 PM ceased at approximately 11:30 PM
5.	(eastern) February 3, 1988 Date and time of discovery that the discharge was entering the waterways.
	Between 9 PM and 10 PM (eastern) February 3, 1988

_	Tank truck over flow
	Name and address of the owner of the vehicle or facility described above in (6).
,	Par Mar Oil Company
į	PO Box 1026
l	Marietta, OH 45750
	Name and address of the operator of the vehicle or facility described above in (6) and, if different from (7) above, describe the relations between the owner and operator (i.e., employee, subcontractor, lesses etc.)
Į	ouis Woods - Driver
ĺ	Employee of Par Mar Oil Company
•	· · · · · · · · · · · · · · · · · · ·
	Location of the discharge, including county and state.
	Location of the discharge, including county and state. Pennzoil Products Company
F	
F	Pennzoil Products Company
F . (Charleston, WV 25333 Kanawha County List the type of oil and total storage capacities at the facility for any oil related products. Describe the storage tanks at the
F . (Charleston, WV 25333 Kanawha County List the type of oil and total storage capacities at the facility for any oil related products. Describe the storage tanks at the facility, (e.g., above ground, underground, etc.)
F. (Charleston, WV 25333 Kanawha County List the type of oil and total storage capacities at the facility for any oil related products. Describe the storage tanks at the facility, (e.g., above ground, underground, etc.) See attached
F. ()	Charleston, WV 25333 Kanawha County List the type of oil and total storage capacities at the facility for any oil related products. Describe the storage tanks at the facility, (e.g., above ground, underground, etc.) See attached Material(s) discharged.
F (Charleston, WV 25333 Kanawha County List the type of oil and total storage capacities at the facility for any oil related products. Describe the storage tanks at the facility, (e.g., above ground, underground, etc.) See attached
F (Charleston, WV 25333 Kanawha County List the type of oil and total storage capacities at the facility for any oil related products. Describe the storage tanks at the facility, (e.g., above ground, underground, etc.) See attached Material(s) discharged.
F (Charleston, WV 25333 Kanawha County List the type of oil and total storage capacities at the facility for any oil related products. Describe the storage tanks at the facility, (e.g., above ground, underground, etc.) See attached Material(s) discharged. Diesel Fuel

)id	the material enter into any water? (YES or NO) Yes
id	the material enter into any sewer? (YES or NO) NO
	If YES, describe the first water reached and the location of thi water. Elk River located in Kanawha County, Charleston, WV
	
b)	State the quantity of material entering the water described above in 13(a).
Appr	oximately 50-60 gallons
(c)	State the quantity of material reaching the shoreline of the wat described above in 13(a) which did not enter the water.
Appr	oximately 50-60 gallons
(d)	Was the water described above in 13(a), at the time of the spill a tributary of, or physically connected to a hydrological or cresystem? (YES or NO) Yes
(e)	If the answer to 13(d) is YES, describe or name the waterways to which the waters in 13(a) connect or flow.
The	spill entered into the Elk River which flows into the Kanawha
	r and eventually joins into the Ohio River.
	If the answer to 13(d) is NO, does the water described above in 13(a) periodically connect with or flow into any hydrological or creek system? If YES, describe the flow and connection.
	
	·
	the discharge violate any applicable water quality standards, y., NPDES)? If YES, describe:
٥V	

No ·
old the material cause any sludge or emulsion to be deposited on the djoining shorelines of, or beneath the surface of, the waters describ bove in 13(a) (e) or (f)? If YES, describe:
No
Describe any observed damage to animal life or vegetation.
None observed
Describe in detail what actually caused the discharge.
The tank truck driver, a customer's employee, over flowed his truck
compartment. The product spilled onto the ground
Describe steps taken to contain and clean up the spilled material and mitigate environmental damage.
The spill area and collection ditch were cleaned
Describe action taken or proposed to prevent a recurrence of this type of spill.
Discussion with this particular driver as well as others as to proper
notification if an emergency occurs while they are loading during off

21. List the federal and state agencies, if any, to which the owner or operator reported the discharge. Show the agency, its location, the date and time of notification and the official contacted.



WVA	DNR							
						 	 	
Nati	onal	Spill	Response	Cente	er.			

22. List the state and local officials who were on-scene at the spill during or after clean up.

After clean-up WVA DNR Representative made inspection of sight issuing clean bill.

23. List the names and addresses of persons believed to have knowledge of the facts surrounding this incident.

No one was present at the terminal after the driver left with his load.

24. List any other information you wish to bring to the attention of the federal government.

The above information should be mailed to:

U.S. ENVIRONMENTAL PROTECTION AGENCY
REGION III
REMOVAL RESPONSE SECTION (3HW25)
841 CHESTNUT STREET
PHILADELPHIA. PA 19107

If you cannot answer this letter by APR 1 1 1088 or if there are any questions on this matter, you may call Carol Oleksiak at (215) 597-0496.

Sincerely,

Stephen Jarvela, Chief Removal Response Section

Signature

I hereby certify the above to be true and accurate to the best of my knowledge.

This information request is not subject to review by the Director of OMB pursuant to the requirements of the Paperwork Reduction Act, 44 U.S.C. § 3507.





UNITED STATES ENVIRONMENTAL PROTECTION AGENCY REGION III

841 Chestnut Building Philadelphia, Pennsylvania 19107

January 27, 1990

Commander (mep)
2nd Coast Guard District
1430 Olive Street
St. Louis, MO 63101

RE: WV90040

Gentlemen:

The enclosed case file documents a spill of approximately 1 quart of Diesel Oil at Charleston, wV located in Kanawha County, within the 2nd Coast Guard District. The spill ocurred on November 1, 1989 and entered the Elk River to Kanawha River to Ohio River.

The spill caused a visible film, sheen, emulsion or a discoloration upon the surface of the Elk Riverja harmful quantity of oil as defined by 40 CFR 110.3. The incident was a violation of Section 311 (b)(3) of the Federal Water Pollution Control Act, as amended.

It is recommended that civil penalty action pursuant to Section 311 (b)(b) of the FWPCA be considered in this case.

If there are any questions, or if we can provide additional assistance, please call Charles Kleeman at (215) 597-4018.

Sincerely,

Stephen R. Wastersug, Director

Hazardous Wayte Management Division

Enclosures





UNITED STATES ENVIRONMENTAL PROTECTION AGENCY REGION III

841 Chestnut Building Philadelphia, Pennsylvania 19107

NOV 8 1989

Pennzoil
1015 Barlow Street
Charleston, WV 25333

RE: WV90040

11/1/89

Same As Above

Gentlemen:

This office has received notification that your facility discharged oil or hazardous materials in quantities that may be harmful, in violation of Section 311(b)(3) of the Federal Water Pollution Control Act Amendments of 1972, 33 U.S.C. § 1321(b)(3). Pursuant to Section 308(a), 33 U.S.C. § 1318(a), you are hereby required to submit to EPA the following information. Any person who violates Section 308 is subject to a civil penalty of up to \$10,000 per day of violation 33 U.S.C. § 1319(d). Further, any person who willfully or negligently violates Section 308 may be punished by a fine of not less than \$2,500, nor more than \$25,000 per day of violation, or by imprisonment for not more than one year or both. 33 U.S.C. § 1319(c)(1).

. •	Does the facility have a National Pollutant Discharge Elimination System (NPDES) Permit? YES or NO Yes If YES, state the Permit number: WV 0045225
2•	Does the facility currently have a Resource Conservation and Recovery Act (RCRA) Permit or is the facility under Interim Status?
	No
3.	Does the facility have a Spill Prevention Control and Countermeasure (SPCC) Plan certified and implemented in accordance with 40 CFR 112?
	YES or NO: Yes
4.	Time and date of discharge.
	10:30AM, 11/1/89
	Time and date of discharge.



ame and addre	ess of the owner of the vehicle or facility described
Pennzoil I	roducts Co.
1015 Barlo	w Drive
Charlesto	ı, WV 25333
bove in (6) etween the o tc.)	ess of the operator of the vehicle or facility descri- and, if different from (7) above, describe the relati- oner and operator (i.e., employee, subcontractor, les
Same	
ocation of t	he discharge including county and state.
	he discharge, including county and state.
	he discharge, including county and state. on, Kanawha County, WV
Charlest List the type for any oil r facility, (e.	of oil and total storage capacities at the facility elated products. Describe the storage tanks at the g., above ground, underground, etc.)
Charlest List the type for any oil r facility, (e.	of oil and total storage capacities at the facility elated products. Describe the storage tanks at the
Charlest List the type for any oil r facility, (e.	of oil and total storage capacities at the facility elated products. Describe the storage tanks at the g., above ground, underground, etc.)
Charlest List the type for any oil r facility, (e. Type-Die	of oil and total storage capacities at the facility elated products. Describe the storage tanks at the go, above ground, underground, etc.) sel, kerosene, gasoline, motor oil corage - 4,225,000 gal.
Charlest List the type for any oil r facility, (e. Type-Die Total st Material(s)	of oil and total storage capacities at the facility elated products. Describe the storage tanks at the go, above ground, underground, etc.) sel, kerosene, gasoline, motor oil corage - 4,225,000 gal.
Charlest List the type for any oil r facility, (e. Type-Die	of oil and total storage capacities at the facility elated products. Describe the storage tanks at the go, above ground, underground, etc.) sel, kerosene, gasoline, motor oil corage - 4,225,000 gal.



(a)	If YES, describe the first water reached and the location of the water. Elk River, 2.5 miles from mouth of Elk River as it
	enters Kanawha River, Charleston, WV
(b)	State the quantity of material entering the water described above in 13(a).
	1.0 quart
(c)	State the quantity of material reaching the shoreline of the w described above in 13(a) which did not enter the water. None
(d)	Was the water described above in 13(a), at the time of the spi a tributary of, or physically connected to a navigable waterwa (YES or NO) Yes
(e)	If the answer to 13(d) is YES, describe or name the waterways which the waters in 13(a) connect or flow.
	Elk River into Kanawha
(f)	If the answer to 13(d) is NO, does the water described above i 13(a) periodically connect with or flow into any hydrological creek system? If YES, describe the flow and connection.
	the discharge violate any applicable water quality standards, g., NPDES)? If YES, describe:



	es, sheen was 10 ft. wide x 30 ft. long
Y	es, sheen was 10 It. wide x 30 25
d	d the material cause any sludge or emulsion to be deposited on the joining shorelines of, or beneath the surface of, the waters descrive in 13(a) (e) or (f)? If YES, describe:
	No
)e:	scribe any observed damage to animal life or vegetation.
	None
٠.	scribe in detail what actually caused the discharge.
,	Water pumped from Elk River thru barge hose to tank
	For tank #403's hydrotest. When water drained back to
	Elk River, 1.0 quart of diesel was in pipeline or barge
	scribe steps taken to contain and clean up the spilled material an tigate environmental damage.
	River boom deployed immediately
	Absorbent pads picked up diesel.
	scribe action taken or proposed to prevent a recurrence of this ty
	At end of hydrotest, the first discharge back to the ri
_	will be in a drum. At the bottom of the tank draining,



- 21. List the federal and state agencies, if any, to which the owner or operator reported the discharge. Show the agency, its location, the date and time of notification and the official contacted.
 - a. Amer. Water Works Service, Charleston, WV 10:45 + 11:00am Homer Clark - all on 11/1/89
 - b. National Response Center, St. Louis, Mocase 1479476. Brantley
 - c. WV Dept. Nat. Resources, Charleston, WV, 11:15am, Dave Cunningha
- 22. List the state and local officials who were on-scene at the spill during or after clean up.

None	

23. List the names and addresses of persons believed to have knowledge of the tacts surrounding this incident.

William Haynes, c/o Pennzoil Products, 1015 Barlow Drive,

Charleston, WV 25333 PH: 304-346-5222

24. List any other information you wish to bring to the attention of the federal government.

Although it was a very small spill, we were obligated to

report it under the law. It was completely cleaned up.

The above information should be mailed to:

U.S. ENVIRONMENTAL PROTECTION AGENCY
REGION III
WESTERN RESPONSE & OIL ENFORCEMENT SECTION (3HW32)
841 CHESTNUT STREET
PHILADELPHIA, PA 19107

If you cannot answer this letter by $\frac{H}{3} \frac{1}{2} \frac{1}{2} \frac{1}{2}$, or if there are any questions on this matter, you may call Carol Oleksiak at (215) 597-0496.

Sincerely,

Charles Kleeman, Chief Western Response and Uil Enforcement Section

I hereby certify the above to be true and accurate to the best of my knowledge.

This information request is not subject to review by the Director of OMB pursuant to the requirements of the Paperwork Reduction Act, 44 U.S.C. 3 3507.

PENNZOIL COMPANY				OB GILLAR
```73445	11FEB87	Sycamore Creek, Roane Co., WV	\$200.00	01/20/889
2P73464	27MAY87	Rush Run, Harrison Co., WV	\$75.00	02/05/88
2P73466	22MAY87	Reedy Creek, Roane Co., WV		02/05/88
2P73488	26AUG87	Rock Creek, Roane Co., WV	\$200.00	07/20/88
2P73504	08DEC87	One Mile Creek, Kanawha Co., WV	\$300.00	11/16/88
2P73506	<b>22</b> DEC87	Riggins Run, Doddridge Co., WV	\$200.00	11/16/88
02940000301400	03FEB88	Elk River, Kanawha Co., WV	\$1000.00	01/30/89_
02940000308100	25APR88	Rock Creek, Roane Co., WV	\$250.00	01/30/89
02940000316000	11FEB88	Banner Run, Roane Co., WV(2P83472)	\$100.00	02/02/90
02340000320700	17MAR88	Rock Creek, Roane Co., WV	\$150.00	02/02/90
02940000325900	25MAY89	Price Creek, Wetzel Co., WV	\$150.00	09/11/89
02940000328500	15MAY89	Buffalo Creek, Washington Co., PA	\$100.00	10/05/89
02940000323400	25APR89	Sycamore Creek, Roane Co., WV	\$200.00	11/07/89
02940000331800	20AUG89	Rock Creek, Roane Co., WV	\$250.00	11/07/89
02040000302100	27AUG89	Granny's Creek, Clay Co., WV	,	01/10/90
02040000302500	020CT89	Sycamore Creek, Calhoun Co., WV	•	01/10/90
02040000304100	120CT89	Left Fork of Sandy Creek, Clay Co., WV	•	01/10/90

#### ATTACHMENT I

### Facility Name and Address

Pennzoil Products Company	(Etowah Terminal)
1015 Barlow Dr.	
Charleston, WV 25333	
	1

As required per 40 CFR 112.5(b), I have reviewed this SPCC plan and, to the best of my knowledge it remains current and accurate.

- 1). Charles W. Hartsell, Jr.
- 2). John L. Hutchinson

1). Chals W. Hatall J.
2). John R. Dutchinson

- 1). Marine & Terminal Adm. (Off-Site Mg
- 2). Branch Manager (On-Site Manager)

Title

1). August 3, 1989

2). 8-7-89

Attach to existing SPCC plan and send a copy to:

Michael S. Ishimoto Pennzoil Company P. O. Box 2967 Houston, Texas 77252-2967